


# WAN ENCAPSULACION PPP AUTHENTICATION CHAP

---

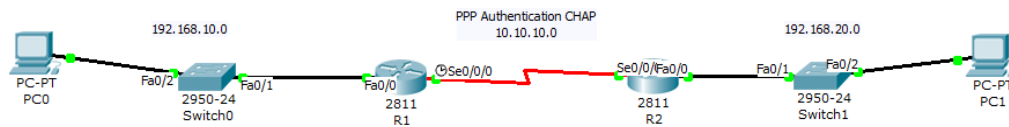

## Configuraciones de las interfaces

### R1

```
int fa0/0
ip add 192.168.10.1 255.255.255.0
no shutdown
exit
int s0/0/0
ip add 10.10.10.1 255.255.255.252
clock rate 64000
no shutdown
```

### R2

```
int fa0/0
ip add 192.168.20.1 255.255.255.0
no shutdown
exit
int s0/0/0
ip add 10.10.10.2 255.255.255.252
no shutdown
```

## Habilitacion del enrutamiento RIPv2

### R1

```
router rip
network 192.168.10.1
network 10.10.10.1
```

### R2

```
router rip
network 192.168.20.1
network 10.10.10.2
```

## Encapsulaciones PPP en las interfaces seriales

### R1

```
conf t
hostname R1
username R2 password ciscopap
int s0/0/0
encapsulation ppp
ppp authentication chap
```

### R2

```
conf t
```

```
hostname R2
username R1 password ciscopap
interface serial 0/0/0
encapsulation ppp
ppp authentication chap
```